


MALE PIPE THREAD ADAPTER SILVER BRAZE

Intended for use with Class 200 or 700
Copper Nickel Tube IAW MIL-T-16420
Copper Tube IAW MIL-T-24107
Brass Tube IAW MIL-T-20168

Specification: MIL-F-1183
Pressure Rating: 400 PSIG (WOG)

SERVICE RATING TABLE				
Nominal Pipe Size (INCHES)	Maximum Working Pressure (LB/IN ²)	Maximum Temperature (°F)	Maximum Working Pressure (LB/IN ²)	Maximum Temperature (°F)
1/4 through 6	200	425	400	150
Above 6	150	425	250	150

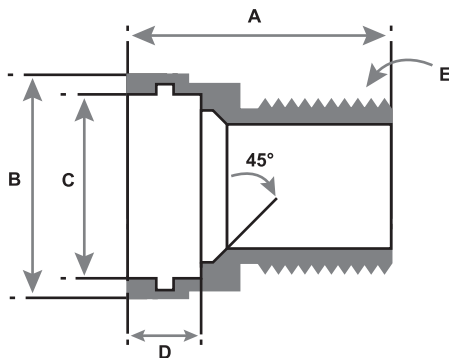

BRONZE
ASTM B61 / QQ-C-390 / MIL-B-16541
(ALLOY C90300 / C92200)

AVAILABLE ALLOY: BRONZE

NOMINAL PIPE SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
SMI P/N	ABMPT040	ABMPT060	ABMPT100	ABMPT150	ABMPT200	ABMPT250	ABMPT300	ABMPT400	ABMPT450	ABMPT500	ABMPT600
A	1.063	1.125	1.438	1.500	1.750	1.875	2.063	2.125	3.188	3.344	3.688
B	0.700	0.855	1.020	1.250	1.535	1.900	2.160	2.675	3.215	3.880	4.940
C	0.540 MIN - 0.543 MAX	0.675 MIN - 0.678 MAX	0.840 MIN - 0.843 MAX	1.050 MIN - 1.053 MAX	1.315 MIN - 1.318 MAX	1.660 MIN - 1.663 MAX	1.900 MIN - 1.905 MAX	2.375 MIN - 2.380 MAX	2.875 MIN - 2.882 MAX	3.500 MIN - 3.507 MAX	4.500 MIN - 4.507 MAX
D	17/64	5/16	3/8	13/32	7/16	1/2	5/8	21/32	25/32	53/64	29/32
E	1/4 X 18	3/8 X 18	1/2 X 14	3/4 X 14	1 X 11.5	1-1/4 X 11.5	1-1/2 X 11.5	2 X 11.5	2 1/2 X 8	3 X 8	4 X 8

NOTES: Brazing rings IAW QQ-B-654, BCuP-5 are to be used with grooved fitting ends.
Fittings may be ordered with reduced ends.